


- Designs exceed standards for ANSI and ETSI
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



### Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V 80mADC	CWW@100KHz 0.1V		
MT0461	(7-8):(5-2):(4-1):(8-9)	(5-1),(tie2+4)	(7-9)TO(1-4)	(7-9)TO(5-2)	
	(2:3:3:2)	26.5mH~29.5mH	110PF MAX	110PF MAX	
	<b>DCR</b>		<b>Hi-Pot</b>	<b>THD</b>	
	(7-9)	(1-4)=(5-2)	PRI TO SEC	200KHZ 6V p-p @ 135Ω	
	3.0ΩMAX	10ΩMAX	2000V AC 1mA 6S	-75dB TYP	

### DIMENSIONS (unit: inch/mm):

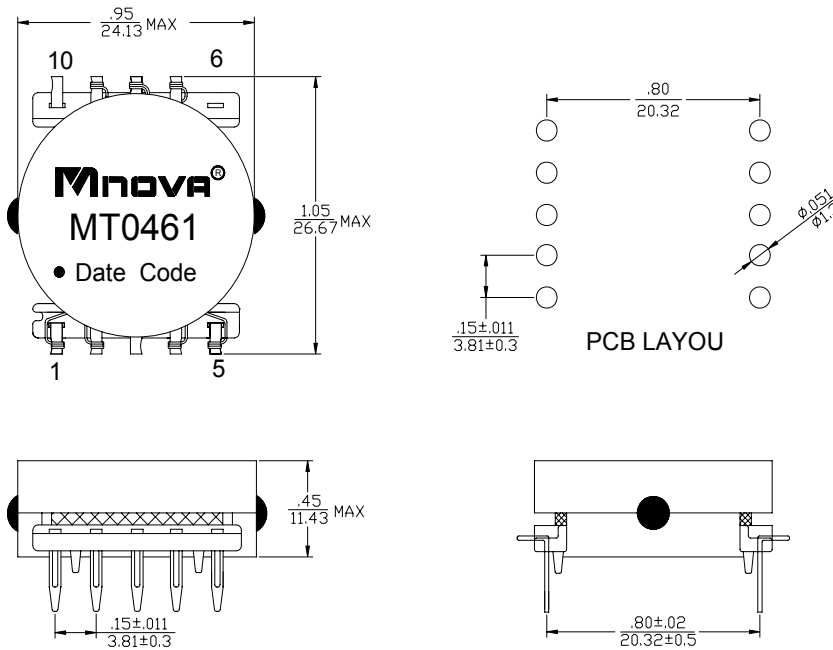

### SCHEMATICS:

